

# Portofino 190

19-01-2026

## technical data sheet

EN

### Product specifications

Three-layer parquet	EN 13489	DoP PQ2021-5
Size	Plank	190 x 400-1900 x 14(3) mm
	Box	6 planks / 2,166 m <sup>2</sup> / 15,65 kg
	Full planks	5
	Pallet	50 boxes / 108,3 m <sup>2</sup> / 802,5 kg
Density	EN 323	± 650 kg/m <sup>3</sup>
Installation		Tongue & Groove
Top layer		European oak (Quercus robur)
Core		Poplar (Populus deltoides)
Counter balance		Poplar (Populus deltoides)
Grading		Rustic A
Texture		Slightly Brushed
Bevel		2V Microbevel
Gloss level at 60°		4-6 %
Finishing		UV Oil
Warranty conditions	Residential warranty	20 years
	Commercial warranty	upon request
Use class	EN 13489	Class 23 Heavy domestic use 

### Product properties

property	test method	min. req.	result
Indoor air certifications			REACH, A
Reaction to fire	 EN 13501-1		Dfl-s1
Slip resistance	 CEN/TS 15676		Dry 54
Formaldehyde emission	 EN 717-1	≤ 0.124 mg/m <sup>3</sup>	E1
Pentachlorophenol content	 CEN/TR 14823	< 5 ppm	Does not contain pentachlorophenol
Underfloor heating	 EN 12664	R < 0.15 m <sup>2</sup> K/W	R = 0,10 m <sup>2</sup> K/W OK (max +28°C) + glued
Biological durability			Class 1

Cleaning and maintenance instructions: [www.lamett.eu](http://www.lamett.eu)



# Portofino 190


19-01-2026

Rustic A

EN

## Grading description

Texture	Slightly Brushed
Grading	Slightly rustic
Colour variation	Low
Sound knots	≤ 2 per plank, Ø ≤ 35 mm
Unsound knots	≤ 2 per plank, Ø ≤ 20 mm
Sapwood	≤ 30 mm, ≤ 20% of width
End crack	< 3 mm wide, < 150 mm long
Surface crack	Not allowed
Insect hole	Not allowed
Decay	Not allowed
Blue/yellow stain	Not allowed
Sound heart	Not allowed
Machine marks	Not allowed

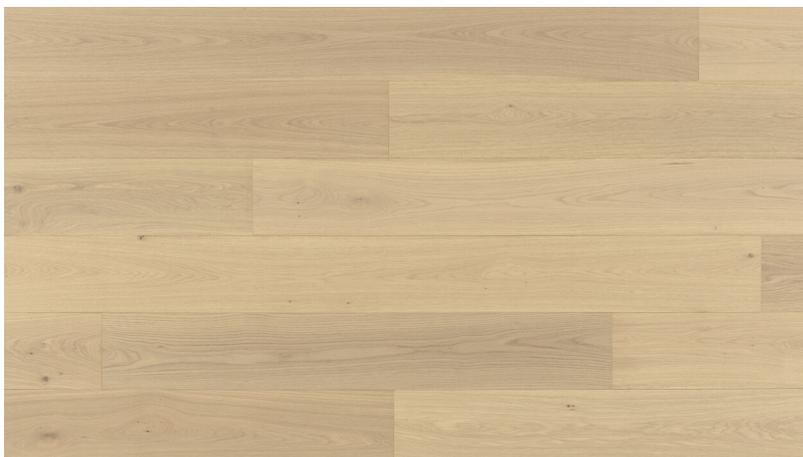

This picture is an indication of the grading as described.

## Grading description

Scale from (rigid) parquet without knots up to planks with more and larger knots



From little colour variation/sapwood to bigger colour variation/sapwood

